

# NXS10-D176-S8D

**SFP+ 10G ZR DWDM 80 km**

## Features

- SFP+ Form Factor
- 10 Gb/s bitrate
- Up to 80 km over Singlemode
- LC connector
- C17~C61, EML laser, APD photodiode
- Up to 2 W power consumption
- +0/+70°C temperature range
- Built in digital diagnostic monitoring



## Applications

- 10x Gigabit Ethernet over DWDM
- Access, Metro and Enterprise
- 8x/10x Fibre Channel

## Optical specifications



**Optical budget EOL : 24 dB**


## Transmitter Receiver optical Specifications

| Parameter      | Min | Max | Unit |
|----------------|-----|-----|------|
| Tx Power       | 1   | 5   | dBm  |
| Rx Sensitivity | -23 |     | dBm  |

## Electrical Environmental Specifications

| Parameter            | Value   | Unit |
|----------------------|---------|------|
| Power supply voltage | 3.3     | V    |
| Power supply current | 700     | mA   |
| MTBF                 | 2000000 | hrs  |
| Relative humidity    | 5~85    | %    |

## Transceiver electrical pad layout

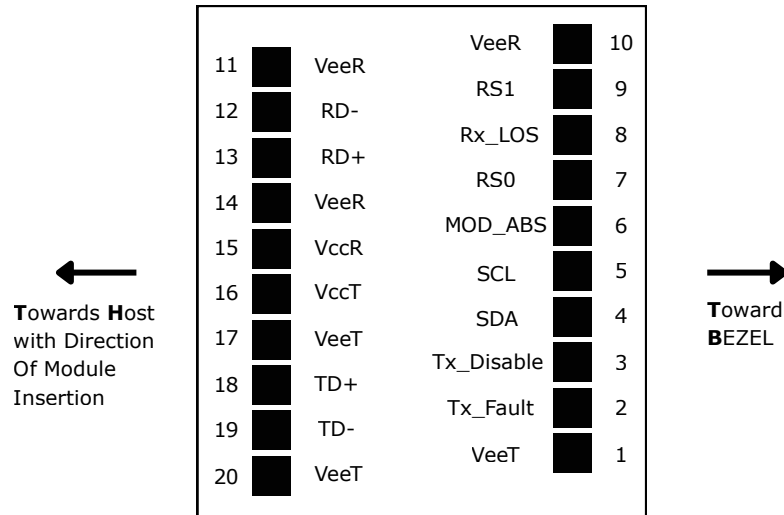

## Module electrical PIN definition

SFP+ - SFF 8431

| Pin | Symbol     | Description                                                    | Note |
|-----|------------|----------------------------------------------------------------|------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | Tx_Fault   | Transmitter Fault.                                             | 2    |
| 3   | Tx_Disable | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | SDA        | 2-wire Serial Interface Data Line                              | 4    |
| 5   | SCL        | 2-wire Serial Interface Clock Line                             | 4    |
| 6   | MOD_ABS    | Module Absent. Grounded within the module                      | 4    |
| 7   | RS0        | Rate Select 0                                                  | 5    |
| 8   | Rx_LOS     | Loss of Signal indication. Logic 0 indicates normal operation. | 6    |
| 9   | RS1        | No connection required                                         | 1    |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-        | Receiver Inverted DATA out. AC Coupled                         |      |
| 13  | RD+        | Receiver Non-inverted DATA out. AC Coupled                     |      |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | VccR       | Receiver Power Supply                                          |      |
| 16  | VccT       | Transmitter Power Supply                                       |      |
| 17  | VeeT       | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+        | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-        | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground)               | 1    |

## Note

1. Circuit ground is internally isolated from chassis ground.
2. Tx\_Fault is an open collector/drain output, which should be pulled up with a  $4.7k\Omega - 10k\Omega$  resistor on the host board if intended for use. Pull up voltage should be between 2.0V to  $V_{cc} + 0.3V$ . A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm threshold. A low output indicates normal operation. In the low state, the output is pulled to  $<0.8V$ .
3. Laser output disabled on Tx\_Disable  $>2.0V$  or open, enabled on Tx\_Disable  $<0.8V$ .
4. Should be pulled up with  $4.7k\Omega - 10k\Omega$  host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with  $4.7k\Omega - 10k\Omega$  on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.