

# NXS28-3312-S1D

## SFP28 25GBASE-BXD 1330/1270nm 10km Singlemode

### Features

- SFP28 Form Factor
- 25 Gb/s bitrate
- Up to 10 km over Singlemode
- LC connector
- Tx1330/Rx1270nm, DFB laser, PIN photodiode
- Up to 1.3 W power consumption
- +0/+70°C temperature range
- Built in digital diagnostic monitoring



### Applications

- 25GBase Ethernet
- Access and Enterprise

### Optical specifications



**Optical budget EOL : 6.3 dB**


### Transmitter & Receiver optical Specifications

Parameter	Min	Max	Unit
Tx Power	-7	3	dBm
Rx Sensitivity	-13.3	2	dBm

### Electrical & Environmental Specifications

Parameter	Value	Unit
Power supply voltage	3.3	V
Power supply current	400	mA
MTBF	2031488.06	hrs
Relative humidity	5~85	%

## Transceiver electrical pad layout

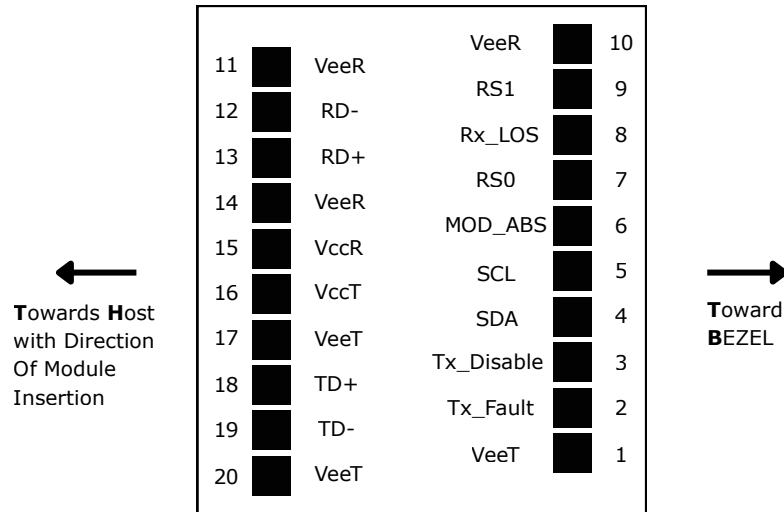

## Module electrical PIN definition

SFP28 - SFF 8472

Pin	Symbol	Description	Note
1	VeeT	Transmitter Ground (Common with Receiver Ground)	1
2	Tx_Fault	Transmitter Fault.	2
3	Tx_Disable	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	3
5	SCL	2-wire Serial Interface Clock Line	3
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	Rate Select 0	5
8	Rx_LOS	Loss of Signal indication. Logic 0 indicates normal operation.	6
9	RS1	No connection required	1
10	VeeR	Receiver Ground (Common with Transmitter Ground)	1
11	VeeR	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VeeR	Receiver Ground (Common with Transmitter Ground)	1
15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	
17	VeeT	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VeeT	Transmitter Ground (Common with Receiver Ground)	1

## Note

1. Circuit ground is internally isolated from chassis ground.
2. Tx\_Fault is an open collector/drain output, which should be pulled up with a 4.7k $\Omega$  – 10k $\Omega$  resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm threshold. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on Tx\_Disable >2.0V or open, enabled on Tx\_Disable <0.8V.
4. Should be pulled up with 4.7k $\Omega$ - 10k $\Omega$  host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7k $\Omega$  – 10k $\Omega$  on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.